

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/21343 A1(51) International Patent Classification⁷: **B22D 17/00**,
17/18, 17/20

(21) International Application Number: PCT/GB00/03552

(22) International Filing Date:
15 September 2000 (15.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9922695.3 24 September 1999 (24.09.1999) GB(71) Applicant (for all designated States except US): **BRUNEL UNIVERSITY** [GB/GB]; Uxbridge, Middlesex UB8 3PH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FAN, Zhongyun** [CN/GB]; Wolfson Centre for Material Processing, Brunel University, Uxbridge, Middlesex UB8 3PH (GB). **BEVIS, Michael, John** [GB/GB]; Wolfson Centre for MaterialProcessing, Brunel University, Uxbridge, Middlesex UB8 3PH (GB). **Ji, Shouxun** [CN/GB]; Wolfson Centre for Material Processing, Brunel University, Uxbridge, Middlesex UB8 3PH (GB).(74) Agent: **TOLLETT, Ian**; Williams, Powell & Associates, 4 St Paul's Churchyard, London EC4M 8AY (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR PRODUCING SEMISOLID METAL SLURRIES AND SHAPED COMPONENTS

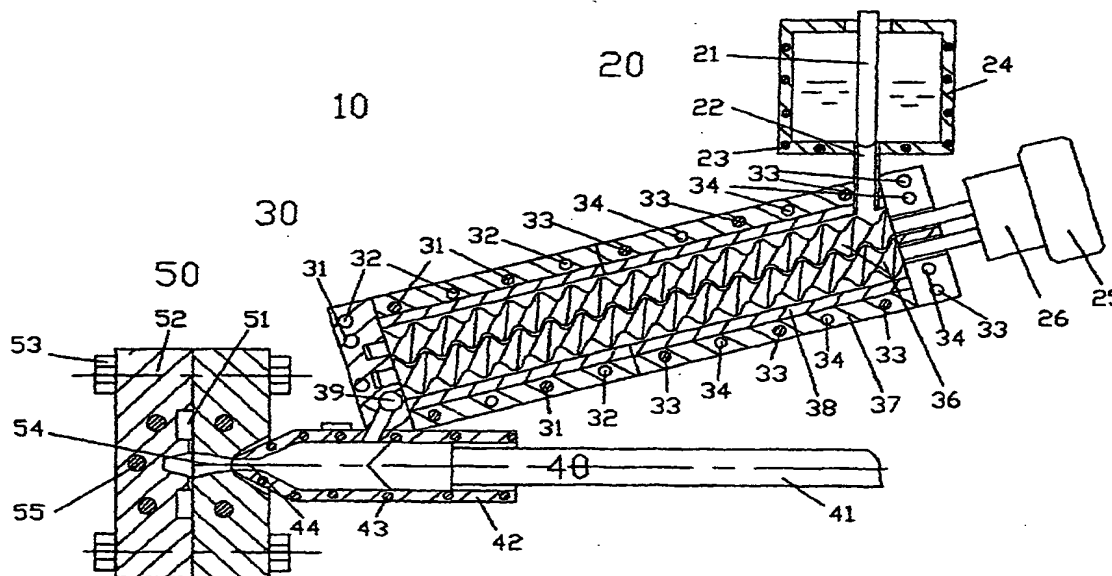

(57) Abstract: A method and apparatus for converting liquid alloy into its thixotropic state and for fabricating high integrity components by injecting subsequently the thixotropic alloy into a die cavity (51). The apparatus includes a liquid metal feeder (20), a high shear twin-screw extruder (30), a shot assembly (40) and a central control system. The apparatus and method can offer net-shaped components characterised by close to zero porosity, fine and equiaxed particles with a uniform distribution in the eutectic matrix, and a large range of solid volume fractions.

WO 01/21343 A1